


Griffin™

Ion Discharge type ESE 이온 방전형 유도광역 피뢰침



- The most suitable rod type lightning rod for the revised KS C IEC 62305
- Reasonable Price
- Superior protection efficiency
- Stainless steel construction
- Good Design

Features

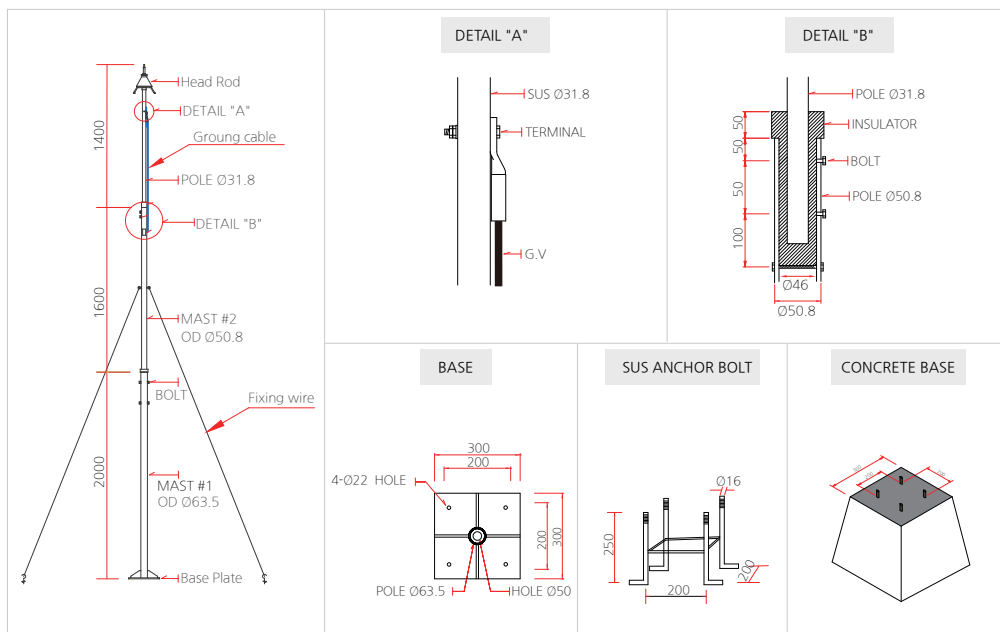

Protective radius of Griffin

Protection Level	Model No.	Level 1 (NP1)			Level 2 (NP2)			Level 3 (NP3)		
		98 %			95 %			80 %		
		SK340	SK450	SK660	SK340	SK450	SK660	SK340	SK450	SK660
HIGHT	2	19	27	32	25	34	40	28	38	44
	3	28	41	48	38	52	59	42	57	65
	4	38	55	64	50	69	78	57	76	87
	5	48	68	79	63	86	97	71	95	107
	6	48	69	79	64	87	97	72	96	107
	10	49	69	79	66	88	99	75	98	107



EN 61643-1



PSE



HH05020-10001A



ISO 9001:2000



ISO 14001:2004



본사 / 공장

경기 안양시 동안구 시민대로 361 평촌에이스타워 303호

Tel : 031-464-1051

Fax : 031-464-1060

admin@primepowersolutions.com

www.primesolution.co.kr